




## FLEXADUX® Aramid CL PRO

**Light weight and very flexible  
Aramid ducting**

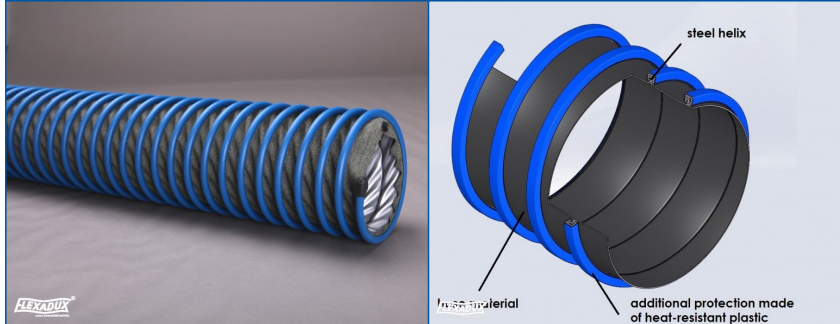

### Material:

One-side Silicone-coated Aramid; fabric, inside: silver / outside: green, with blue protection profile

### Single Length:

3 to 10 meters

### Temperature Resistance:

- 60° C to + 300° C to exhaust guidelines and sufficient fresh air intake (approx. 50%)

### Applications:

Suction of hot fumes, gases or dust in all fields of industry, particularly suitable for the automotive industry thanks to its abrasion protection profile which protects the cars from scratches

### Properties:

Good temperature resistance, outer wear strip, good resistance to mechanical influences and vibrations

## TECHNICAL DATA

Dia. (mm)	Weight (kg/m)	Wall Thickness (mm)	Bending radius (mm)	Max. Work. Press. (bar)	Max. Vacuum (bar)
63	0,60	0,40	36	0,78	0,22
76	0,75	0,40	45	0,62	0,14
80	0,80	0,40	48	0,61	0,12
102	0,90	0,40	60	0,51	0,08
110	0,92	0,40	66	0,48	0,06
120	1,00	0,40	72	0,36	0,05
127	1,02	0,40	75	0,33	0,05
152	1,25	0,40	90	0,22	0,04
160	1,28	0,40	96	0,21	0,03
180	1,48	0,40	126	0,17	0,02
203	1,65	0,40	140	0,15	0,02

Further diameters available upon request!

Technical data are based on + 23° C.



**SCHAUENBURG RUHRKUNSTSTOFF GMBH**

Weseler Str. 35 · 45478 Mülheim-Ruhr · Germany · Tel. +49 (0) 2 08 99 91-0 · Fax +49 (0) 2 08 5 33 74 · mail@schauenburg-rk.com