


Richtlänge Datum length [mm]	Längentoleranz Length tolerance [mm]	Satztoleranz Set tolerance [mm]
1960 < Ld ≤ 5000	± 2	4
5000 < Ld ≤ 8000	± 4	8
8000 < Ld ≤ 10000	± 6	12
10000 < Ld ≤ 12500	± 8	16
12500 < Ld ≤ 15000	± 10	20
15000 < Ld ≤ 21000	± 24	48

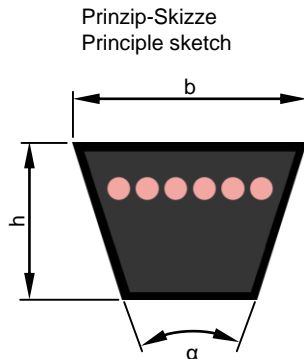

Profil / Section: 25		
b [mm]	h [mm]	α [°]
24,6 ± 1,1	16,0 +1,2/-0,6	37 ± 2

- Aufbau des Riemens:
 1. Umhüllungsgewebe
 2. SBR/NR Mischung
 3. Polyester
 4. SBR/NR Mischung

- V-Belt construction:
 1. Standard cover fabric
 2. SBR/NR compound
 3. Polyester
 4. SBR/NR compound

Kennzeichnungsbeispiel / Marking example:



$L_a \approx L_i + 100$
 $L_d \approx L_i + 60$

Längen-Messbedingungen nach DIN 2215 und ISO 4183
 Length measurement according to DIN 2215 and ISO 4183

	d_d [mm]	254,65 ± 0,05
	U_d [mm]	800
	d_a [mm]	267,25 ± 0,05
	b_d [mm]	21,00
	α [°]	34 ± 10'
	t_{min} [mm]	22
	Q [N]	750
	$L_d = 2a + U_d$	
	$L_a = 2a + U_a$	



optibelt VB S=C Plus

Wir beraten Sie gerne über die Produkteigenschaften und -anpassungen bei besonderen Anforderungen. Bitte beachten Sie auch die Hinweise in den Optibelt Dokumentationen. Irrtümer und technische Änderungen vorbehalten. www.optibelt.com, © Optibelt GmbH
 We would be pleased to offer advice about technical characteristics and drive design as well as special requirements. Further information can be found in Optibelt documentation. Subject to technical modification and change, errors and omissions excepted. www.optibelt.com, © Optibelt GmbH

4			
3			
2			
1	Freigabe	08.03.2016	HGr
0	Erstellt	08.03.2016	MJr
Zust.	Änderungen	Datum	Name

Profil 25

Dateiname: Datenblatt_optibelt VB S=C Plus_25.pdf