


**KIT per tendicatena / KIT for chain tighteners**  
Pignone tendicatena in acciaio su forcella – Tipo: 2RR  
*Sprocket made of steel on the fork – Type: 2RR*

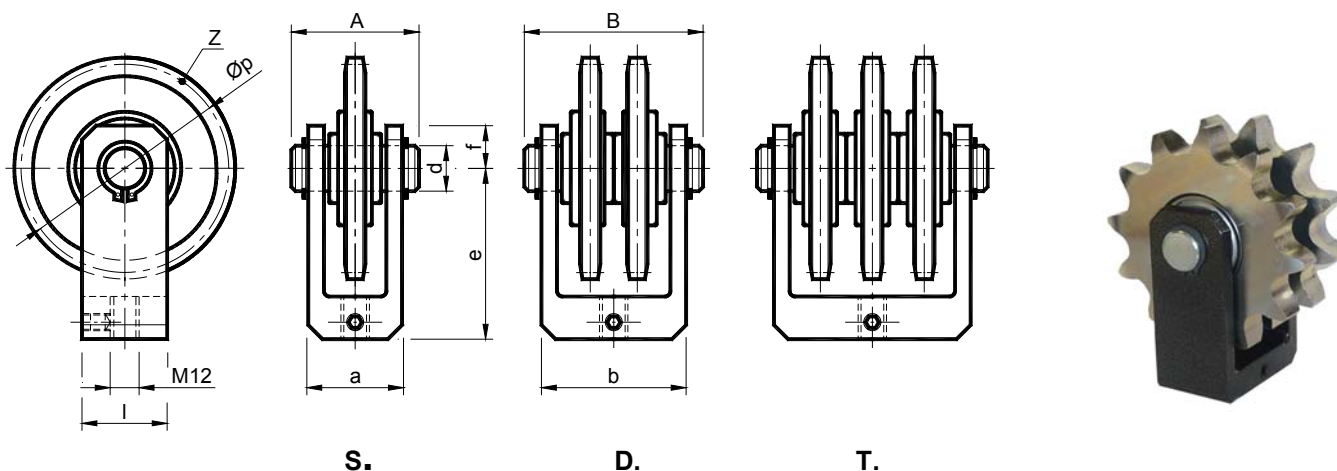

**MATERIALI** La forcella in acciaio o in alluminio. Il cuscinetto, la corona dentata e il perno sono in acciaio.

**TRATTAMENTI** Forcella in acciaio verniciato o in alluminio sabbiato. Corona e perno in acciaio zincato.

**IMPIEGO** Pignone folle su forcella. Il pignone è costituito da una corona in acciaio, montata su cuscinetti con base maggiorata nazionale. A richiesta si possono fornire cuscinetti INA. I kit per catene triple, ASA, metrici o non unificati vengono eseguiti solo su richiesta. Velocità di lavoro ≤60 m/min. Temperatura di lavoro ≤100°C.

**MATERIALS** The fork is made of steel or aluminium. The bearing, the toothed crown and the pin are made of steel.

**TREATMENTS** Fork made of sandblasted aluminium or painted steel. Crown and pin made of galvanized steel.

**USE** Idle pin on the fork. The sprocket consists of a steel crown, installed on national enlarged bearings. On demand INA bearings can be supplied. The KIT for triple chains, ASA, metric or not standard are made only on request. Operating speed ≤60 m/min. Operating temperature ≤100°C.

Tipo Type	Cod. N° S.	Cod. N° D.	Catena Chain	a	A	b	B	d	e	f	l	Øp	Z	Peso Weight in Kg	
														S.	D.
<b>2RR 50-5</b>	ΔTB001960	○TB001980	1" x 17.02mm	35	45	67	78	20	77.5	17.5	40	98.14	12	1.00	2.33
<b>2RR 50-6</b>	○TB001963	○TB001983	1"1/4 x 3/4"	40	50	80	88	20	100	25	50	132.65	13	2.90	4.56
<b>2RR 60-7</b>	○TB001966	○TB001986	1"1/2 x 1"	50	60	98	110	20	100	25	50	135.21	11	3.30	5.40
<b>2RR 60-8</b>	○TB001969	○TB001989	1"3/4 x 1"1/4	55	65	114	125	30	115	25	50	157.77	11	5.00	10.00
<b>2RR 70-9</b>	○TB001972	○TB001992	2" x 1"1/4	55	65	114	125	30	125	25	50	180.34	11	7.00	14.00

Δ: Forcella in fusione di alluminio / Fork made of light metal die cast

○: Forcella in acciaio saldato / Fork made of welded steel